


# Neo-Dyn® Series 180P Vacuum Pressure Switch

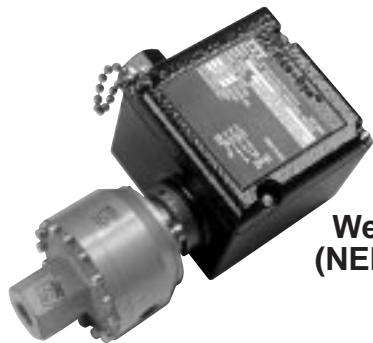

**Weather Proof  
(NEMA 4 and 13)**

## DESCRIPTION

Low-range, adjustable vacuum switch. Efficient Nega-Rate® Belleville disc spring sensing mechanism. Weather proof enclosure and stable set points during system pressure changes makes this switch ideal for a wide variety of applications.

## Operating Pressure Data

Adjustable Range Number	Adjustable Set Point Range		Deadband (approximate)	Maximum Recommended System Pressure	Proof Pressure
	Increasing	Decreasing			
4	3" to 28" Hg	1" to 26" Hg	2" Hg	225	350

All values given in psig.

## Standard Specifications

### Electrical

Snap action electrical switch listed by Underwriters' Laboratories, Inc. and CSA Testing Laboratories

### Electrical Connection

½" - 14 NPT female conduit connection with terminal block

### Pressure Connection

¼" - 18 NPT Female

### Temperature Range\*

Ambient: -40°F to +180°F  
(-40°C to +82°C)

Media: -40°F to +250°F  
(-40°C to +121°C)

\*Temperature limits change with O-Ring selection

### Adjustment

Concealed wrench flat adjustment with range scale

### Shipping Weight

Approximately 3.5 pounds

## Ordering Sequence — Select desired option for each category

### OPTIONS

#### Wetted Material

- 1 Aluminum port and body, Teflon coated polyimide diaphragm, Buna-N O-Rings and stainless steel
- 4 Stainless steel, Teflon coated polyimide diaphragm and Buna-N O-Rings

#### Adjustable Range

- 4 1" Hg dec. to 28" Hg inc. (0.0 bar dec. to 0.9 bar inc.)

#### Electrical Form

- C 15 amps 125, 250 or 480 VAC; 2 amps 600 VAC; ½ hp 125 VAC; ¼ hp 250 VAC; .5 amps resistive, .04 amps inductive 125 VDC
- CC 11 amps and ¼ hp 125 or 250 VAC; 5 amps resistive, 3 amps inductive 28 VDC; .5 amps resistive 125 VDC

#### Enclosure

- 3 Meets or exceeds the requirements of NEMA Type 3, 3R, 3S, 4, 4X and 13

#### Miscellaneous

- A Epoxy paint exterior — extra protection for severe environments
- B Viton O-Ring
- C EPR O-Ring
- L Neon indicator light — 115 VAC
- M Gold electrical contacts for extremely low current applications
- S Stainless steel diaphragm (Range 4 and Wetted Material 4 only)

#### Special (Consult representative or factory)

- Non-catalog adjustable range and/or set point, deadband and proof pressure
- Operating temperature capability from -65°F to +350°F
- 10 amps 125 VDC electrical rating
- Chemical seals installed
- Optional orientation of Low Pressure Port

## Ordering Procedure

- When factory presetting is desired, stipulate set point, increasing or decreasing
- Insert available option number or letter designation as required

## Example

