



STAINLESS STEEL MINIATURE F.R.L COMBINATION Filter Regulator & Lubricator

Features


- For medium pressure use, up to 3000 kPa inlet
- Ideal for corrosive, marine and chemical environments
- High flow rate
- Effectively removes water and particles
- Accurate and sensitive pressure setting
- Lubricator oil can be replenished in operation
- Oil spray in mist ensures good lubrication for machines
- Light weight & compact

How to Order

Stainless steel 316 miniature		Port Size	Thread	Drain	Options
MFRL		02	G	H	PG1
MFRL	Miniature Filter Regulator & Lubricator	02 1/4"	G BSP N NPT	H Manual drain D Auto drain	PG1 304 case & 316 wetted parts (standard) PG2 316 case & wetted parts

Specifications

MODEL	MFRL
Port Size	1/4"
Fluid	Compressed Air
Regulator Construction	Piston
Body Material	Stainless Steel 316
Bowl Material	Stainless Steel 316
Pressure Gauge Material	Refer Options
Filter Element Material	Stainless Steel 316
Filtration	5µm standard- 40µm option
Regulating Range	50 - 2000 kPa
Maximum Inlet Pressure	3000 kPa
Maximum Flow Rate	1850 l/min
Ambient Temperature	-10°C ~ 60°C
Lubricator Oil (Recommended)	ISO-VG32
Filter Bowl Capacity	105cc
Lubricator Bowl Capacity	125cc
Standard Drain	Manual
Net Weight	2660g
Accessories	Pressure Gauge, mounting bracket, plug and screws

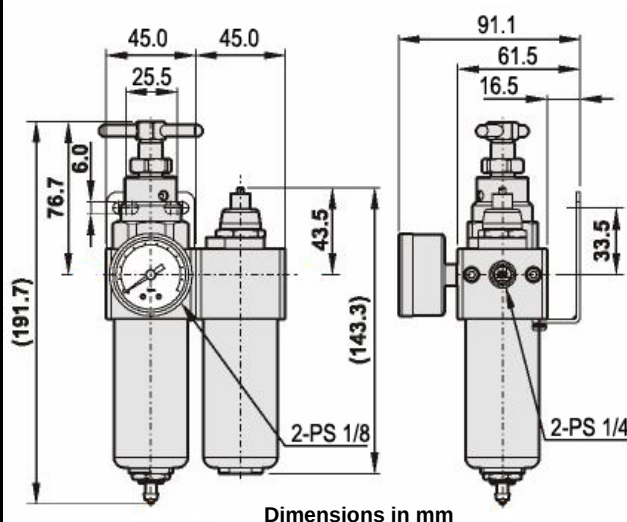

Unit 1, 8 Baretta Road
WANGARA WA 6065
Tel : 08 9409 7566
Fax: 08 9409 7153
Email sales@zedflo.com.au
Web www.zedflo.com.au