



**Explosion Proof
Hermetically Sealed
(NEMA 7 and 9)**

DESCRIPTION

A lower priced alternative to the 119P, this field adjustable, compact pressure switch is intended for low- to mid-range process applications. The Tri-Clamp® compatible process connection makes this switch ideal for food, beverage and other sanitary services. Set point stability and vibration resistance are a function of the Nega-Rate® Belleville disc spring. This unit features 316 stainless steel construction, an explosion-proof/hermetically sealed electrical module, 18" standard free leads and SPDT or DPDT electrical forms.†

Operating Pressure Data

Adjustable Range Number	Adjustable Set Point Range		Deadband (approximate)	*Maximum Recommended System Pressure	*Proof Pressure
	Increasing	Decreasing			
2	3 to 30	1 to 28	2	1000	1500
4	20 to 80	15 to 75	5	1000	1500
5	50 to 250	30 to 230	20	1000	1500
6	200 to 400	175 to 375	25	1000	1500
7	375 to 725	330 to 680	45	1000	1500

All values given in psig.

*Note: Pressures are switch ratings. Check clamp manufacturer for clamp rating.

Standard Specifications

Electrical

Snap action electrical switch listed by Underwriters' Laboratories, Inc., Factory Mutual and CSA Testing Laboratories

Electrical Connection

1/2" - 14 NPT male conduit connection with PVC insulated 18 AWG leads 18" long

Pressure Connection

1 1/2" sanitary fitting mates with Tri-Clamp® fitting†

Temperature Range

Ambient: -40°F to +180°F
(-40°C to +82°C)

Media: -40°F to +250°F
(-40°C to +121°C)

Adjustment

Internal, slotted adjustment nut with range scale

Shipping Weight

Approximately 2 pounds

Ordering Sequence — Select desired option for each category

OPTIONS

Wetted Material

5 316 stainless steel port and diaphragm, heliarc welded

Adjustable Range

2 1 psig dec. to 30 psig inc. (.07 bar dec. to 2.1 bar inc.)
4 15 psig dec. to 80 psig inc. (1.0 bar dec. to 5.5 bar inc.)
5 30 psig dec. to 250 psig inc. (2.1 bar dec. to 17.2 bar inc.)
6 175 psig dec. to 400 psig inc. (12.1 bar dec. to 27.6 bar inc.)
7 330 psig dec. to 725 psig inc. (22.8 bar dec. to 50.0 bar inc.)

Electrical Form

C 11 amps and 1/4 hp 125 or 250 VAC; 5 amps resistive, 3 amps inductive 28 VDC; .5 amps resistive 125 VDC
CC 11 amps and 1/4 hp 125 or 250 VAC; 5 amps resistive, 3 amps inductive 28 VDC; .5 amps resistive 125 VDC

Enclosure

6 Explosion proof • factory sealed • hermetically sealed electrical assembly P/N 057-0030 (C Form); P/N 057-0057 (CC Form). Underwriters' Laboratories, Inc. listed (file #E56677) or Canadian Standards Association certified (file #34146) for Division 1 and 2; Class I, Groups A, B, C and D; Class II, Groups E, F and G hazardous locations (NEMA 7 and 9)

Miscellaneous

I 3/4" Conduit box with terminal strip
M Gold electrical contacts for extremely low current applications
N CENELEC approval
R 72" Electrical free leads

Special (Consult representative or factory)

■ Non-catalog adjustable range and/or set point, deadband and proof pressure

†Tri-Clamp® is a Registered Trademark of Tri-Clover Inc.

Ordering Procedure


- When factory presetting is desired, stipulate set point, increasing or decreasing
- Insert available option number or letter designation as required

Example


Series
Wetted Material
Adjustable Range
Electrical Form (specify)
Enclosure
Miscellaneous

117P 52 C 6 _

Envelope Dimensions

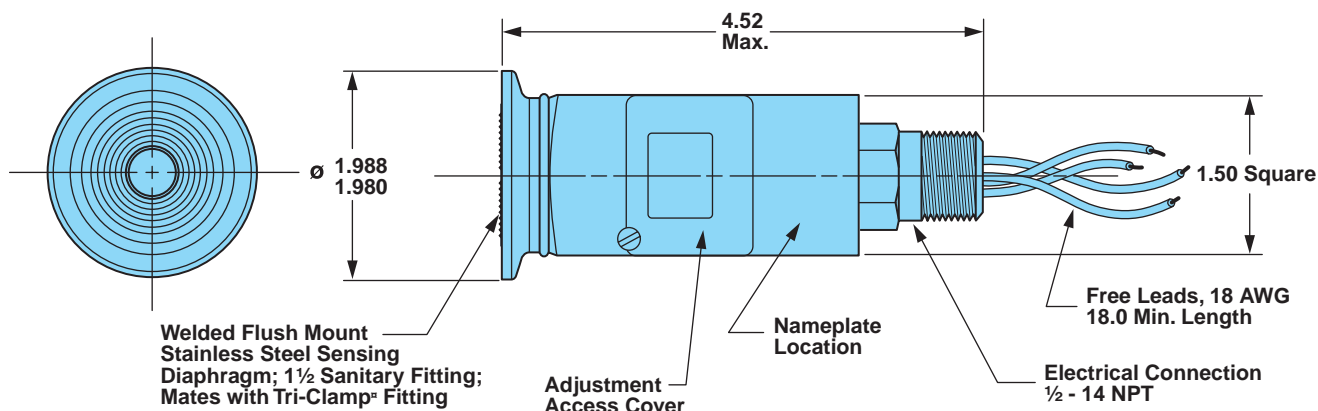

Electrical Form

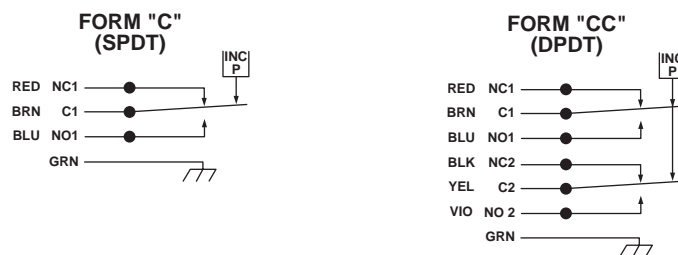

Basic Principles of Design

