



STAINLESS STEEL FILTER REGULATOR

Features

- For high pressure use, up to 4500 kPa inlet
- Ideal for corrosive, marine and chemical environments
- Effectively removes water and particles
- Accurate and sensitive pressure setting

How to Order

Stainless steel 316
filter regulator

FR

FR Filter Regulator

Port Size

02

02	1/4"
03	3/8"
04	1/2"

Thread

N

G	BSP
N	NPT

Drain

H

H	Manual drain
D	Auto drain

Options


PG1

PG1	304 case & 316 wetted parts (standard)
PG2	316 case & wetted parts



Specifications

MODEL	FR-02	FR-03	FR-04
Port Size	1/4"	3/8"	1/2"
Fluid	Compressed Air	Compressed Air	Compressed Air
Regulator Construction	Piston	Piston	Piston
Body Material	Stainless Steel 316	Stainless Steel 316	Stainless Steel 316
Bowl Material	Stainless Steel 316	Stainless Steel 316	Stainless Steel 316
Pressure Gauge Material	Refer options	Refer options	Refer options
Filter Element Material	Stainless Steel 316	Stainless Steel 316	Stainless Steel 316
Filtration	5µm standard - 40µm option	5µm standard - 40µm option	5µm standard - 40µm option
Regulating Range	50 - 3000 kPa	50 - 3000 kPa	50 - 3000 kPa
Maximum Inlet Pressure	4500 kPa	4500 kPa	4500 kPa
Maximum Flow Rate	2200 l/min	2500 l/min	3800 l/min
Ambient Temperature	-10°C ~ 70°C	-10°C ~ 70°C	-10°C ~ 70°C
Filter Bowl Capacity	110cc	110cc	110cc
Standard Drain	Manual	Manual	Manual
Net Weight	2000g	2000g	2000g
Accessories	Pressure Gauge, mounting bracket, plug and 2x screws	Pressure Gauge, mounting bracket, plug and 2x screws	Pressure Gauge, mounting bracket, plug and 2x screws

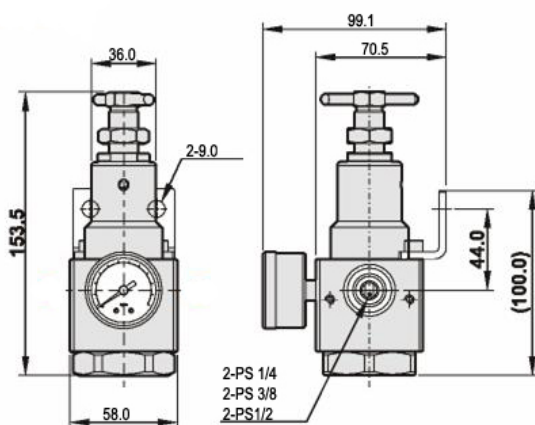

Dimensions in mm



Unit 1, 8 Baretta Road
WANGARA WA 6065
Tel : 08 9409 7566
Fax: 08 9409 7153
Email sales@zedflo.com.au
Web www.zedflo.com.au