



STAINLESS STEEL FILTER

Features

- For high pressure use, up to 4500 kPa inlet
- Ideal for corrosive, marine and chemical environments
- Effectively removes water and particles

How to Order


Stainless steel 316 Filter

Stainless steel 316 Filter	Port Size	Thread	Drain
F	02	N	H
F Filter	02 1/4"	G BSP N NPT	H Manual drain D Auto drain
	03 3/8"		
	04 1/2"		



Specifications

MODEL	F-02	F-03	F-04
Port Size	1/4"	3/8"	1/2"
Fluid	Compressed Air	Compressed Air	Compressed Air
Body Material	Stainless Steel 316	Stainless Steel 316	Stainless Steel 316
Bowl Material	Stainless Steel 316	Stainless Steel 316	Stainless Steel 316
Filter Element Material	Stainless Steel 316	Stainless Steel 316	Stainless Steel 316
Filtration	5µm standard- 40µm option	5µm standard- 40µm option	5µm standard- 40µm option
Operating Pressure Range	50 - 4500 kPa	50 - 4500 kPa	50 - 4500 kPa
Maximum Inlet Pressure	4500 kPa	4500 kPa	4500 kPa
Maximum Flow Rate	2440 l/min	2450 l/min	3030 l/min
Ambient Temperature	-10°C ~ 70°C	-10°C ~ 70°C	-10°C ~ 70°C
Filter Bowl Capacity	110cc	110cc	110cc
Standard Drain	Manual	Manual	Manual
Net Weight	1650g	1650g	1650g
Accessories	Mounting bracket and 2x screws	Mounting bracket and 2x screws	Mounting bracket and 2x screws

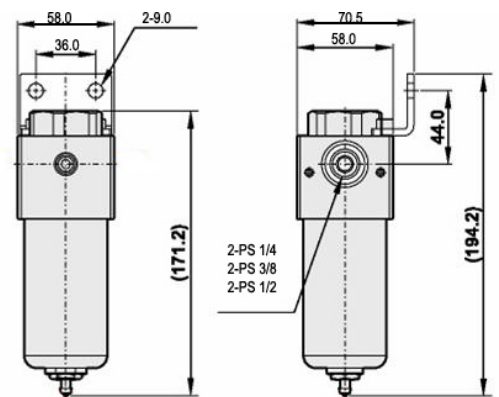

Dimensions in mm

ZEDFLO
AUSTRALIA

Unit 1, 8 Baretta Road
WANGARA WA 6065
Tel : 08 9409 7566
Fax: 08 94097153
Email sales@zedflo.com.au
Web www.zedflo.com.au