




STAINLESS STEEL LUBRICATOR

Features


- For high pressure use, up to 4500 kPa inlet
- Ideal for corrosive, marine and chemical environments
- Lubricator oil can be replenished in operation
- Oil spray in mist ensures good lubrication for machines

How to Order

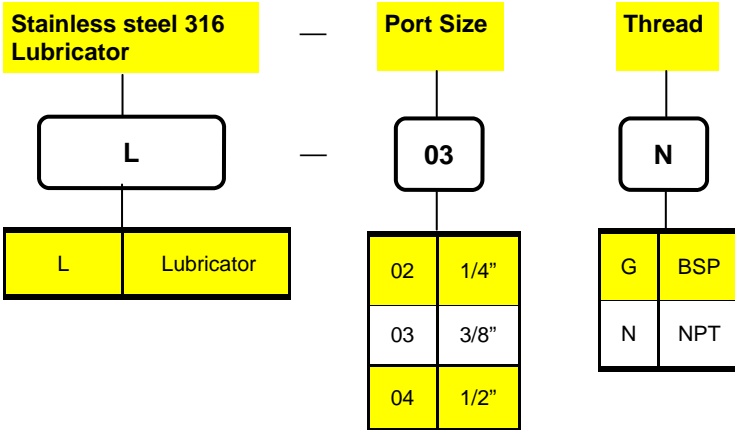

Specifications

MODEL	L-02	L-03	L-04
Port Size	1/4"	3/8"	1/2"
Fluid	Compressed Air	Compressed Air	Compressed Air
Body Material	Stainless Steel 316	Stainless Steel 316	Stainless Steel 316
Bowl Material	Stainless Steel 316	Stainless Steel 316	Stainless Steel 316
Operating Pressure Range	50 - 4500 kPa	50 - 4500 kPa	50 - 4500 kPa
Maximum Inlet Pressure	4500 kPa	4500 kPa	4500 kPa
Maximum Flow Rate	2500 l/min	2525 l/min	4100 l/min
Ambient Temperature	-10°C ~ 70°C	-10°C ~ 70°C	-10°C ~ 70°C
Lubricator Oil (Recommended)	ISO-VG32	ISO-VG32	ISO-VG32
Lubricator Bowl Capacity	130 cc	130 cc	130 cc
Net Weight	1750g	1750g	1750g
Accessories	Mounting bracket and 2x screws	Mounting bracket and 2x screws	Mounting bracket and 2x screws

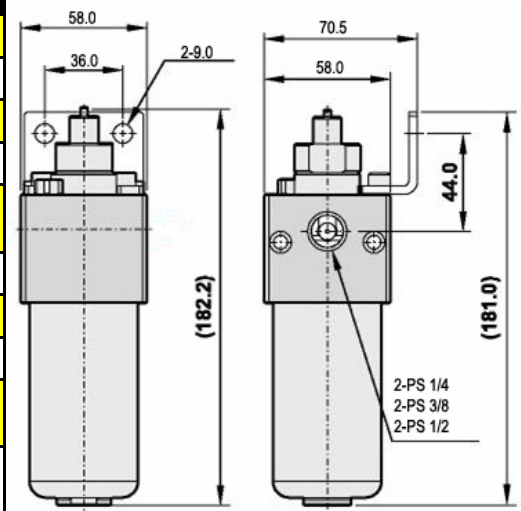

Dimensions in mm



Unit 1, 8 Baretta Road
 WANGARA WA 6065
 Tel : 08 9409 7566
 Fax: 08 9409 7153
 Email sales@zedflo.com.au
 Web www.zedflo.com.au